



Home of the Multi-Task Genie™ Family



 **dijkstra  
vereenigde**

Postbus 2151

8203 AD Lelystad

Tel: 0320-266171

Pascallaan 9

8218 NJ Lelystad

Fax: 0320-257354

email: [laboratorium@dijkstra.net](mailto:laboratorium@dijkstra.net)

[www.dijkstra.net](http://www.dijkstra.net)

# Vortex-Genie® Mixers



**THE ORIGINAL**



## Vortex-Genie® 1

- Violent single high-speed vortexing
- Easy-to-use Touch On operation
- Large, 6mm orbit for aggressive vortexing of difficult samples
- May be used with Pop-off Cup (shown) or optional 3-inch Platform
- Vortex-Genie quality at an even more economical price!

## Vortex-Genie® 2

- OUR MOST POPULAR MODEL
- Variable speed for precise mixing from gentle to vigorous
- Broad range of attachments for most tubes, plates and other containers
- Hands-Free or Touch On control
- May be used in cold rooms and incubators

### SPECIFICATIONS

Vortex-Genie Model	Vortex-Genie 1	Vortex-Genie 2
Supplied	Pop-off Cup	3-inch Platform, Pop-off Cup
Speed (RPM)	3200 (2700 for 50Hz models)	600-3200 (2700 for 50Hz models)
Timer - Touch On: Hands-Free:	N/A	N/A
Dimensions (base) (D x W x H)	165 x 122 x 165mm (6.5 x 4.8 x 6.5in)	165 x 122 x 165mm (6.5 x 4.8 x 6.5in)
Weight	4 Kg (8.8 lb)	4 Kg (8.8 lb)
Markings / Warranty	ETL, CE / 2-Year	ETL, CE / 2-Year

### CATALOG NUMBERS

120V	SI-0136	SI-0236 (Model G560)
230V - No Plug	SI-0146	SI-0246 (Model G560E)
230V - European Plug	SI-0156	SI-0256 (Model G560E)
230V - British Plug	SI-0166	SI-0266 (Model G560E)
230V - Swiss Plug	SI-0176	SI-0276 (Model G560E)
240V - Australian Plug	SI-0196	SI-0297 (Model G560E)
100V	SI-0186	SI-0286

See page 3 for accessories.

U.S. Pats. 4,781,487  
5,707,861

# Vortex-Genie® Mixers



## Vortex-Genie® 2T

- Same great features as the Vortex-Genie 2 with an integrated timer
- Timer function:
  - Touch On: 1-60 seconds
  - Hands-Free: 1-60 minutes or continuous
- Unit automatically stops at the end of user-programmed time
- May be used in cold rooms and incubators

## Digital Vortex-Genie® 2

- Same great features as the Vortex-Genie 2 with digital control and display of speed and time
- Digital display provides accuracy, reproducibility and repeatability
- Timer function:
  - Touch On: 1-99 seconds
  - Hands-Free: 1-99 minutes or continuous
- May be used in cold rooms and incubators

### SPECIFICATIONS

Vortex-Genie Model	Vortex-Genie 2T	Digital Vortex-Genie 2
Supplied	3-inch Platform, Pop-off Cup	3-inch Platform, Pop-off Cup
Speed (RPM)	600-3200 (2700 for 50Hz models)	500-3000 (2850 for 50Hz models)
Timer - Touch On: Hands-Free:	1-60 seconds 1-60 minutes or continuous	1-99 seconds 1-99 minutes or continuous
Dimensions (base) (D x W x H)	165 x 122 x 165mm (6.5 x 4.8 x 6.5in)	165 x 122 x 165mm (6.5 x 4.8 x 6.5in)
Weight	4 Kg (8.8 lb)	4 Kg (8.8 lb)
Markings / Warranty	ETL, CE / 2-Year	CE / 2-Year

### CATALOG NUMBERS

120V	SI-T236	SI-A236
230V - No Plug	SI-T246	SI-A246
230V - European Plug	SI-T256	SI-A256
230V - British Plug	SI-T266	SI-A266
230V - Swiss Plug	SI-T276	SI-A276
240V - Australian Plug	SI-T296	SI-A296
100V	SI-T286	SI-A286

See page 3 for accessories.

U.S. Pats. 4,781,487  
5,707,861

# Vortex-Genie® Family Accessories

For use with Vortex-Genie 2, Vortex-Genie 2T and Digital Vortex-Genie 2



Fig. 1  
Model H301  
Multiple  
Sample  
Starter Set




Fig. 4  
Model H302  
Large  
Sample  
Set




Fig.	Cat. No.	Description	Fig.	Cat. No.	Description
1	504-0233-00	Model H301 Multiple Sample Starter Set	--	SI-0562	TurboMix Attachment, 2.0ml Tubes (not shown)
--	146-6005-00	6-inch Platform (not shown separately)	--	0A-0563-010	1.5ml Snap-top Microtube Holder* (not shown separately)
2	504-0234-00	Microtube Foam Insert (2)	--	0A-0563-011	2.0ml Screw-cap Microtube Holder*
3	504-0235-00	Microplate Foam Insert (2)	14	SI-0511	Large Ampule/Tube Attachment
4	503-0282-00	Model H302 Large Sample Set	15	SI-0570	Small Ampule/Tube Attachment
5	504-0039-00	Recessed Platform	16	SI-0510	Two-Tier Microplate Foam Insert (not shown)
6	503-0278-00	9-16mm Tube Foam Inserts (2)	17	SI-H506	Horizontal 50ml Tube Holder
7	503-0279-00	14-29mm Tube Foam Inserts (2)	18	SI-H512	Horizontal 15ml Tube Holder
8	503-0280-00	29-37mm Tube Foam Inserts (2)	19	SI-H524	Horizontal Microtube Holder
9	503-0277-00	Blank Foam Inserts (2)	20	SI-V506	Vertical 50ml Tube Holder
--	503-0283-00	Assorted Foam Inserts (4)	21	SI-V512	Vertical 15ml Tube Holder
10	568-0001-00	Elastic Bands (2)	22	SI-V524	Vertical Microtube Holder
11	146-3011-00	Pop-off Cup			
12	0K-0500-902	3-inch Platform with Rubber Cover			
13	SI-0563	TurboMix™ Attachment, 1.5ml Tubes			

\* May be used with TurboMix Attachment or Disruptor Genie®

# Cell Disruptors and Media



**ANALOG**

**DIGITAL**

## Disruptor Genie®

- Rapid hands-free disruption of up to 12 microtubes (1.5ml or 2.0ml) at one time
- Timer for speed up to 15 minutes for Analog model, up to 99 minutes for Digital model or continuous for both models
- Unique agitation, vortexing, and collision actions for cell disruption and sample resuspension
- Digital model is ideal for accurate, reproducible, repeatable results, featuring adjustable speed and speed alarm
- Less costly than ultrasonic units or homogenizers

## Disruptor Beads™

- Spherical lead free soda lime glass beads are available in two sizes
- Can be used for disruption of yeast, bacteria, and other samples
- Used in combination with Disruptor Genie or TurboMix™ attachment for Vortex-Genie® 2, Vortex-Genie® 2T or Digital Vortex-Genie® 2

U.S. Pats. 5,707,861  
4,781,487


### SPECIFICATIONS

	Disruptor Genie 1.5ml or 2.0ml	Digital Disruptor Genie 1.5ml or 2.0ml	Disruptor Beads
Supplied	1.5ml or 2.0ml Microtube Holder (tubes not included) and Pop-off Cup	1.5ml or 2.0ml Microtube Holder (tubes not included) and Pop-off Cup	0.1mm diameter beads for bacteria or 0.5mm diameter beads for yeast
Time Range	0-15 minutes or continuous	0-99 minutes or continuous	N/A
Speed	3000 RPM (2850 for 50Hz models)	1000-3000 RPM (2850 for 50Hz models)	N/A
Speed Alarm	N/A	On/Off, Adjustable	N/A
Dimensions (base) (D x W x H)	165 x 122 x 190mm (6.5 x 4.8 x 7.5in)	165 x 122 x 190mm (6.5 x 4.8 x 7.5in)	N/A
Weight	4.3 Kg (9.5 lb)	4.3 Kg (9.5 lb)	375g (8 fl. oz.)
Markings / Warranty	ETL, CE / 2-Year	CE / 2-Year	N/A

### CATALOG NUMBERS

	Disruptor Genie 1.5ml or 2.0ml	Digital Disruptor Genie 1.5ml or 2.0ml	Disruptor Beads
120V	SI-D236 / SI-D237	SI-DD36 / SI-DD37	SI-BG01 (0.1mm)
230V - No Plug	SI-D246 / SI-D247	SI-DD46 / SI-DD47	SI-BG05 (0.5mm)
230V - European Plug	SI-D256 / SI-D257	SI-DD56 / SI-DD57	
230V - British Plug	SI-D266 / SI-D267	SI-DD66 / SI-DD67	
230V - Swiss Plug	SI-D276 / SI-D277	SI-DD76 / SI-DD77	
240V - Australian Plug	SI-D296 / SI-D297	SI-DD96 / SI-DD97	
100V	SI-D286 / SI-D287	SI-DD86 / SI-DD87	

# Microplate Mixers

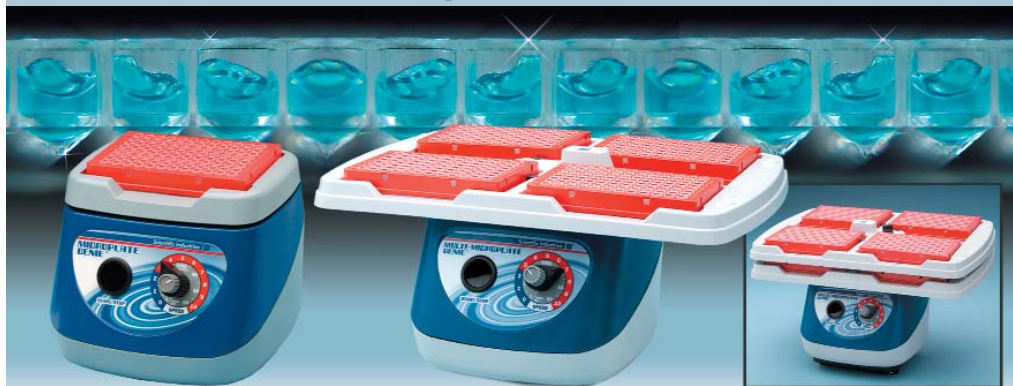

## MICROPLATE GENIE® & MULTI-MICROPLATE GENIE®

- Small vortexing orbit of 1.0mm for thorough mixing regardless of sample viscosity
- High speed and small orbit combine to offer true vortexing action in each well of the microplate
- Accepts most microplate types within the recommendations of the Society for Biomolecular Screening (SBS), even in 384-well formats
- Multi-MicroPlate Genie may be used to shake up to 4 microplates. An optional accessory tray is available to double capacity to shake up to 8 microplates at one time
- Both models may be used in cold rooms and incubators for temperature sensitive applications
- Built-in timer operates from 1 - 60 minutes or continuous for hands-free use

### SPECIFICATIONS

	<b>MicroPlate Genie</b>	<b>Multi-MicroPlate Genie</b>
Stirring Speed	750-3200 RPM (750-2700 RPM for 50Hz models)	750-3200 RPM (750-2700 RPM for 50Hz models)
Time	1-60 minutes or continuous	1-60 minutes or continuous
Vortexing Orbit	1.0mm diameter	1.0mm diameter
Maximum Capacity	1 microplate, any type with standard SBS footprint	4 microplates (8 microplates with optional tray)
Dimensions (D x W x H)	150 x 180 x 165mm (5.75 x 7.0 x 6.5in)	335 x 240 x 165mm (13.2 x 9.4 x 6.5in)
Weight	2.75kg (6.1lb)	3.7kg (8.1lb)
Markings / Warranty	ETL, CE / 2-Year	ETL, CE / 2-Year

### CATALOG NUMBERS

120V	SI-0400	SI-4000
230V - No Plug	SI-0401	SI-4001
230V - European Plug	SI-0402	SI-4002
230V - British Plug	SI-0403	SI-4003
230V - Swiss Plug	SI-0404	SI-4004
240V - Australian Plug	SI-0406	SI-4006
100V	SI-0405	SI-4005
Multi-MicroPlate Accessory Tray	N/A	SI-4010

## MULTI VORTEX-GENIE®

### Large Capacity Multi Vessel Vortex Mixer



**Vortex Anything and Everything that only a Vortex-Genie® can - Only More!**

- Same true vortexing as with the original Vortex-Genie® 2
- Holds multiple test tubes, vials, or cylinders of various sizes (racks included) or up to six 250mL vessels, or a combination of tubes and vessels such as Erlenmeyer flasks
- Designed and built "Genie™" strong, rugged and reliable
- Digital control and display of speed and time for reproducibility and accuracy, with true speed display
- No additional holders or accessories necessary. Racks are included

#### SPECIFICATIONS

Supplied (Capacity)	Two 12-Pack Multi-Tube Racks holding up to 24 tubes of any material up to 29mm dia., or up to six 250mL vessels
Speed	250-1000 RPM (up to 950 RPM for 50Hz models)
Vortexing Orbit	4mm dia. (Same as Vortex-Genie 2)
Timer	1-99 minutes or continuous
Dimensions (D x W x H)	310 x 270 x 195mm (12.2 x 10.6 x 7.7in)
Weight	11.3 Kg (25 lb)
Markings / Warranty	CE / 2-Year

#### CATALOG NUMBERS

120V	SI-M236
230V - No Plug	SI-M246
230V - European Plug	SI-M256
230V - British Plug	SI-M266
230V - Swiss Plug	SI-M276
240V - Australian Plug	SI-M296
100V	SI-M286
12-Pack Multi-Tube Rack	SI-M010
12-Pack Multi-Tube Rack (set of 2)	SI-M020

# Orbital Shakers



# ORBITAL-GENIE™

## Benchtop Orbital Shaker



SI-1500

SI-1700

SI-1600

The Most Versatile Orbital Shaker Available - From the Makers of the Vortex-Genie®!

- Choice of THREE different units depending on preferred platform
- Variable shaking speed with orbit REVERSING
- Fully programmable - time, reversing time, and acceleration/deceleration rates
- Create any mixing action from a smooth vortex to sloshing aeration (or anything in between)
- Equipped with stepper motor, delivering exceptional speed control, accuracy, and durability
- Timer displays time or, when programmed to a defined limit, will shut off the unit
- May be used in cold room or incubator and CO2 environments

## Platform Options



1

**1. Orbital-Genie With Universal Ratcheting Clamps** provides the flexibility for using a mix of different size and shape vessels on a single platform. Unit is supplied with two ratcheting and one non-ratcheting cushioned clamps. Extra ratcheting clamps for more than two rows of smaller vessels are optional.



2

**2. Orbital-Genie With Adhering Mat** provides a flat platform with adhering rubber mat perfect for use with open containers. Patented material is naturally adhering. Rinse clean to renew adhering properties.



3

**3. Orbital-Genie For Standard Flask Clamps** is equipped with a platform for accepting various size flasks or beakers. Clamps sold separately.

# Orbital Shakers

## Accessories



**Flask Clamps** (for SI-1600) are of stainless steel construction for added strength and safety. Mix and match different size clamps on same platform or all same size (capacity is indicated). Includes mounting screws. Note: Flask Clamps can also be used on SI-1700 by removing the blue Adhering Mat.

**Double Sided Adhesive Tape and Adhering Mat** (for SI-1600 or SI-1700) are alternatives to flask clamps for securing vessels to shaker platform. Both are ideal for containers such as bottles and dishes that cannot be held with conventional clamps. Note: Tape and Mat cannot be used on SI-1500.

### ACCESSORIES ORDERING INFORMATION

Catalog No.	Description	Platform Capacity
SI-1610	100mL Flask Clamp	36
SI-1611	125/150mL Flask Clamp	36
SI-1612	250mL Flask Clamp	25
SI-1613	500mL Flask Clamp	16
SI-1614	1L Flask Clamp	9
SI-1615	2L Flask Clamp	5
SI-1616	Double Sided Adhesive Tape Roll, 1.5m x 25.4mm (60in x 1in)	N/A
SI-1617	Adhering Mat, Blue, 460mm x 460mm (18in x 18in)	N/A
SI-1510	Universal Ratcheting Clamp	N/A

### SPECIFICATIONS

Speed	10-300 RPM including Stir Reverse
Timer	1 min - 99 hours w/Alarm or Continuous
Orbit	35mm
Selectable Ramp Rates	10 - 100 rpm/sec
Maximum Load	21 Kg (46 lb)
Platform Dimensions (D x W)	460 x 460mm (18 x 18in)
Overall Dimensions (D x W)	590 x 500mm (23 x 20in)
Markings / Warranty	CE / 2-Year

### CATALOG NUMBERS

	Orbital-Genie Ratcheting Clamps	Orbital-Genie Standard Flask Clamps	Orbital-Genie Adhering Mat
120V	SI-1500	SI-1600	SI-1700
230V - No Plug	SI-1501	SI-1601	SI-1701
230V - European Plug	SI-1502	SI-1602	SI-1702
230V - British Plug	SI-1503	SI-1603	SI-1703
230V - Swiss Plug	SI-1504	SI-1604	SI-1704
240V - Australian Plug	SI-1506	SI-1606	SI-1706
100V	SI-1505	SI-1605	SI-1705

# Combination Rotator and Rocker



Rotate, Rock, or 3-D Orbit Any Container!

- Combines rotating and rocking in one compact unit
- Magnetic platform and various accessories securely hold almost any sample
- Optional 3-D orbital attachment transforms the unit into an orbital platform shaker
- A variety of attachments/accessories are available to provide maximum application versatility
- Maintains set speed between 0-38°C for use in cold rooms or incubators



## SPECIFICATIONS

Supplied	Magnetic Platform, 1 Clip Plate each for 10-13mm, 15-17mm, and 28-30mm Tubes, 4 Bag Mounting Strips, and Non-Skid Tray
Rotating	5-35 RPM
Rocking	10-70 cycles per minute
Rocking Angle	±10 degrees from horizontal
Platform Capacity	4.5 Kg (10 lb)
Dimensions (D x W x H)	252 x 508 x 267mm (9.9 x 20 x 10.5in) Depth with Rocker Tray - 305mm (12in)
Weight	11.8 Kg (26 lb)
Temperature	0-38°C (32-100°F) 95% maximum relative humidity
Markings / Warranty	CE / 2-Year

## CATALOG NUMBERS

120V	SI-1100
230V - No Plug	SI-1101
230V - European Plug	SI-1102
230V - British Plug	SI-1103
230V - Swiss Plug	SI-1104
240V - Australian Plug	SI-1106
100V	SI-1105

U.S. Pat. 5,918,979

# Roto-Shake Genie®, Enviro-Genie® & Incubator-Genie™ Accessories



Fig.	Cat. No.	Description
1	SI-1123	1 Clip Plate for 12 each 10-13mm tubes
2	SI-1124	1 Clip Plate for 6 each 15-17mm tubes
3	SI-1125	1 Clip Plate for 3 each 28-30mm tubes
4	SI-1120	6 Clip Plates for 12 each 10-13mm tubes
5	SI-1121	6 Clip Plates for 6 each 15-17mm tubes
6	SI-1122	6 Clip Plates for 3 each 28-30mm tubes
7	SI-1126	Bag Mounting Strips (pack of 16)
8	SI-1127	Expansion Kit - two stainless steel trays, 24 bag mounting strips
9	SI-1130	2 Clip Plates for Hybridization Tubes
10	SI-1131	1 Stackable Shelf for Enviro-Genie and Incubator-Genie
--	SI-1132	Serial Cable for Enviro-Genie (picture not shown)
11	SI-1134	2 Universal Clip Plates
12	SI-1135	1 Magnetic Covered 100 Microtube Box
13	SI-1136	1 Clip Plate for 100ml Volumetric Flasks
14	0A-1100-070	Non-Skid Tray for Roto-Shake Genie
14	0A-1200-001	Non-Skid Tray for Enviro-Genie and Incubator-Genie
15	SI-1150	3-D Orbital Shaker Attachment for Roto-Shake Genie
15	SI-1250	3-D Orbital Shaker Attachment for Enviro-Genie and Incubator-Genie

# Rotator/Rocker/Stirrer and Temperature Control



# ENVIRO-GENIE®

## BENCHTOP REFRIGERATED INCUBATOR!



Accessories Supplied with Unit

- Chiller, incubator, rotator, rocker and stirrer in one compact unit
- Magnetic platform and various accessories securely hold almost any sample
- Optional 3-D orbital attachment transforms the unit into a temperature-controlled orbital platform shaker
- RS232 interface for data download and/or remote operation

### SPECIFICATIONS

Supplied	Magnetic Platform, 1 Clip Plate each for 10-13mm, 15-17mm, and 28-30mm Tubes, 4 Bag Mounting Strips, Non-Skid Tray, and Stackable Shelf
Rotating	1-35 RPM
Rocking / Rocking Angle	2-70 cycles per minute / $\pm 10$ degrees from horizontal
Stirring	1-2000 RPM including stir reverse
Platform Capacity	4.5 Kg (10 lb)
Temperature Range	4-75°C (39-167°F)
Accuracy / Uniformity	$\pm 0.2^\circ\text{C}$ / $\pm 0.5^\circ\text{C}$
Resolution / Stability	$0.1^\circ\text{C}$ / $\pm 0.1^\circ\text{C}$
Chamber Dimensions (D x W x H)	254 x 362 x 260mm (10 x 14.25 x 10.25in)
Overall Dimensions (D x W x H)	495 x 622 x 368mm (19.5 x 24.5 x 14.5in) Depth with Rocker Tray - 305mm (12in)
Chamber Volume	24 L (0.86 ft <sup>3</sup> )
Weight	36 Kg (80 lb)
Markings / Warranty	CE / 2-year

### CATALOG NUMBERS

120V	SI-1200
230V - No Plug	SI-1201
230V - European Plug	SI-1202
230V - British Plug	SI-1203
230V - Swiss Plug	SI-1204
240V - Australian Plug	SI-1206
100V	SI-1205

See page 10 for accessories.

# Rotator/Rocker/Incubator



# INCUBATOR-GENIE™

## BENCHTOP SHAKING/ROTATING INCUBATOR!



Accessories Supplied with Unit

- Incubate, Rotate, Rock, and Shake all in ONE compact unit
- Magnetic stainless steel platform may be easily set to rock or rotate almost any container
- Precise temperature control and uniformity - range from 28°C to 75°C
- Chamber air is gently and continuously re-circulated ensuring temperature consistency and uniformity
- Shatterproof window allows for inspection of samples without disturbing chamber environment
- A variety of accessories are available to provide maximum application versatility

### SPECIFICATIONS

Supplied	1 Clip Plate each for 10-13mm, 15-17mm, and 28-30mm Tubes, 4 Bag Mounting Strips, Non-Skid Tray, and Stackable Shelf
Rotating	1-35 RPM
Rocking	2-70 cycles per minute
Platform Capacity	4.5 Kg (10 lb)
Temperature Range	28°C - 75°C
Accuracy / Uniformity	±0.2°C / ±0.5°C
Resolution / Stability	0.1°C / ±0.1°C
Chamber Dimensions (D x W x H)	254 x 362 x 260mm (10 x 14.25 x 10.25in)
Overall Dimensions (D x W x H)	400 x 560 x 368mm (15.75 x 22 x 14.5in)
Chamber Volume	24 L (0.86 ft³)
Weight	19.5 Kg (43 lbs.)
Markings / Warranty	CE / 2-Year
<b>CATALOG NUMBERS</b>	
120V	SI-1400
230V - No Plug	SI-1401
230V - European Plug	SI-1402
230V - British Plug	SI-1403
230V - Swiss Plug	SI-1404
240V - Australian Plug	SI-1406
100V	SI-1405

See page 10 for accessories.

U.S. Pat. 5,918,979

# Magnetic Stirrers

## MAGSTIR & MULTIMAGSTIR GENIE®



### Programmable High/Low Speed Stirring

- High and low speed range including reverse and interval stirring for applications ranging from gentle stirring for cell culture to aggressive mixing for viscous polymers
- Three power levels are available for various sample viscosities
- Manual mode provides stir, stir reverse, and time functions
- Profiles mode allows users to quickly program speed, ramp rate, stir direction, time (including pause), and power level. Up to 4 stirring programs can be saved
- Automatic mode recalls and executes one of up to 4 user-defined profiles

### SPECIFICATIONS

	MagStir Genie	MultiMagStir Genie
Stirring Speed	10-1800 RPM	10-1200 RPM
Time	1 second - 99 hours	1 second - 99 hours
Programmable	Yes	Yes
Power Levels	Low, Medium, High	Low, Medium, High
Selectable Ramp Rates	5 - 300 rpm/sec	5 - 300 rpm/sec
Memory	Up to 4 user-defined profiles	Up to 4 user-defined profiles
Maximum Stirring Positions	1	4
Maximum Stirring Capacity	2 L (larger for low speed stirring)	1 L each position (larger for low speed stirring)
Dimensions (D x W x H)	200 x 160 x 55mm (7.9 x 6.3 x 2.2in)	375 x 325 x 48mm (14.8 x 12.8 x 1.9in)
Weight	1.0 Kg (2.2 lb)	3.2 Kg (7.0 lb)
Markings / Warranty	ETL, CE / 2-Year	ETL, CE / 2-Year
CATALOG NUMBERS		
120V/100V	SI-0300	SI-3000
230V - No Plug	SI-0301	SI-3001
230V - European/Swiss Plug	SI-0302	SI-3002
230V - British Plug	SI-0303	SI-3003
240V - Australian Plug	SI-0306	SI-3006

U.S. Pat. 6,962,433

# Magnetic Stirrers

## MEGAMAG GENIE® & QUADMAG GENIE®

Large Volume Stirring



Four Position Stirring



- Powerful "rare earth" magnets automatically pull stir bars into position and stay coupled even under the most demanding stirring conditions
- Rugged ABS/Polycarbonate housing and the famous Vortex-Genie® heavy-duty motor provide years of reliable service
- Both analog control and digital feedback (true speed) versions are available for MegaMag Genie
- True Speed readout (RPM) with feedback control on digital version of the MegaMag Genie is adjustable in 10 RPM increments. Also includes adjustable digital timer

### SPECIFICATIONS

	MegaMag Genie / Digital MegaMag Genie	QuadMag Genie
Stirring Speed	200-1300 RPM	150-1500 RPM
Time	1-99 min or continuous (digital only)	N/A
Programmable	No	No
Power Levels	N/A	N/A
Selectable Ramp Rates	N/A	N/A
Memory	N/A	N/A
Maximum Stirring Positions	1	4
Maximum Stirring Capacity	38 L	2 L each position
Dimensions (D x W x H)	310 x 305 x 130mm (12.25 x 12 x 5.1 in)	310 x 305 x 130mm(12.25 x 12 x 5.1 in)
Weight	3 Kg (6.6 lb)	3 Kg (6.6 lb)
Markings / Warranty	CE / 2-Year	CE / 2-Year

### CATALOG NUMBERS

120V	SI-2236 / SI-3236	SI-4236
230V - No Plug	SI-2246 / SI-3246	SI-4246
230V - European Plug	SI-2256 / SI-3256	SI-4256
230V - British Plug	SI-2266 / SI-3266	SI-4266
230V - Swiss Plug	SI-2276 / SI-3276	SI-4276
240V - Australian Plug	SI-2296 / SI-3296	SI-4296
100V	SI-2286 / SI-3286	SI-4286