


Floor scales KERN BID/BID-D



Floor scale with EC type approval [M]* and the best price-to-performance ratio – now also as a high-resolution dual-range scale

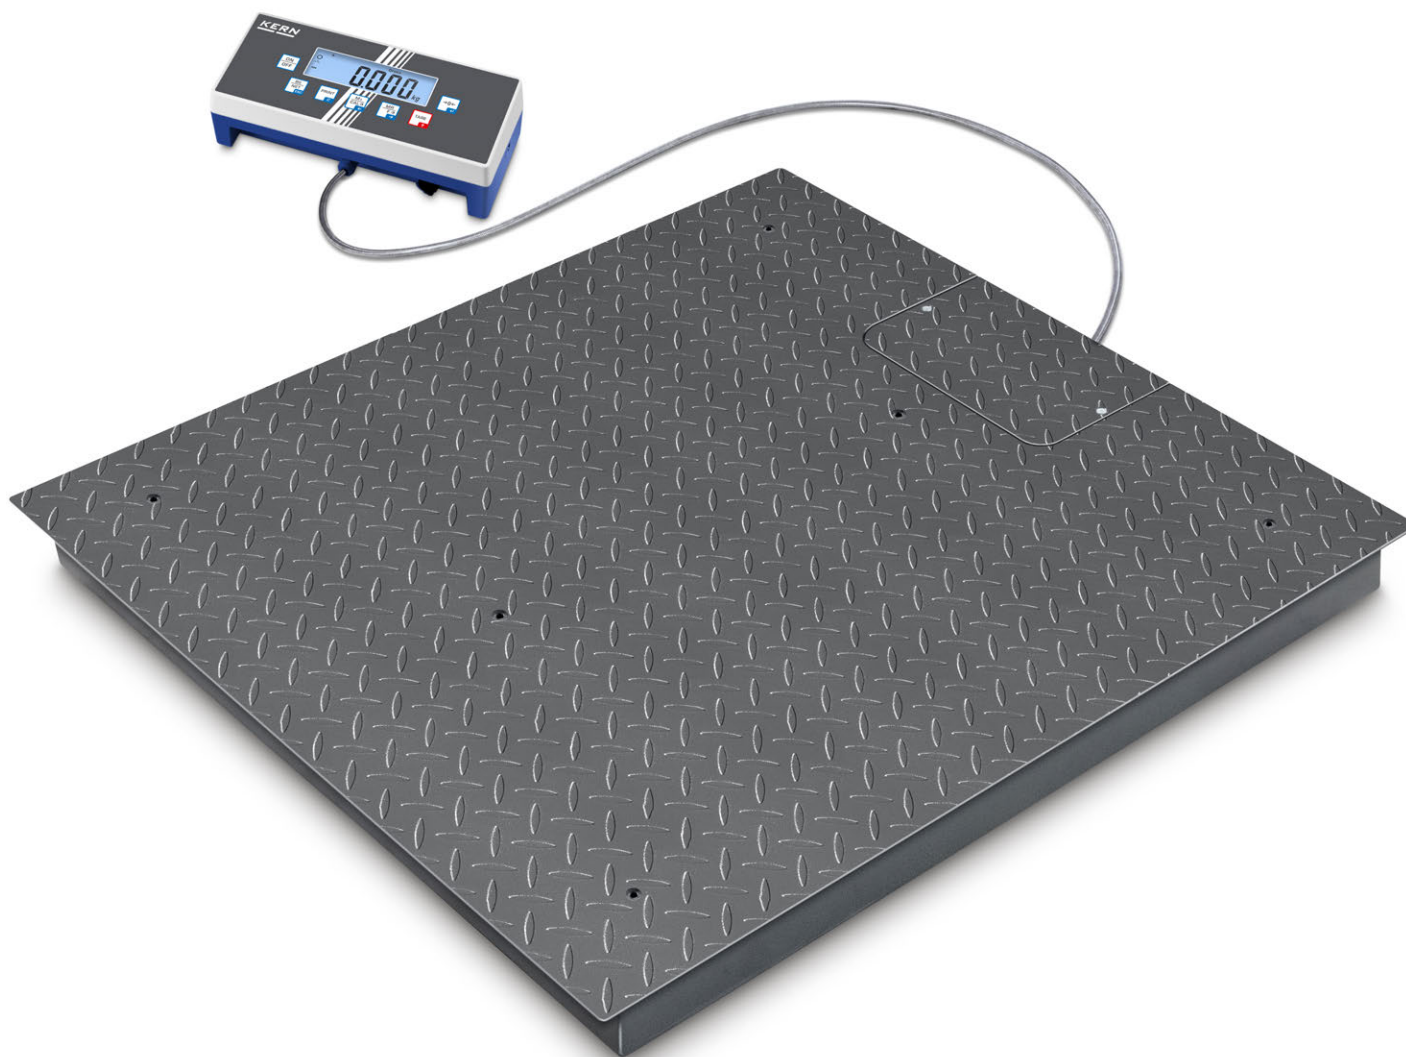

Did you know?

Our floor scales are delivered in a robust wooden box. This protects the high-quality weighing technology from environmental influences and stresses during transportation. KERN – always one step ahead



3 Access ramp incl. pair of base plates to facilitate access of e.g. wire cage trolleys, shelf trolleys, container trolleys, storage trolleys, sack trucks, transpallets, mobile containers, containers refuse etc.



4 Stable pit frame, to install the weighing bridge so you can drive straight on

Floor scales KERN BID/BID-D

Features

- **BID-D: Dual-range floor scales**, ideal, when high maximum loads need to be weighed, but in the lower load range you still need high resolution. This means that two balances can be replaced with one – which saves space and money!
- **BID 1T-4EM**: Compact special size, especially for weighing europallets
- **1 Weighing bridge**: out of anti-slip corrugated steel, 4 silicone-coated steel load cells, dust and spray protection IP67
- **Welded platform** with screw holes to lift the balance for easy cleaning
- **Easy levelling of the weighing bridge** as well as **access to the junction box** from above
- **2 Display device**: for details see KERN KIB-TM
- **Totalising** of weights and piece counts
- Thanks to **interfaces** such as RS-232 or USB, WiFi, Bluetooth, Ethernet (optional), the scale can easily be connected to existing networks. Data exchange between the scale, PC or printer
- **Searching and remote control of the balance** using external control devices or computers with the KERN Communication Protocol (KCP). KCP is a standardised interface command structure for KERN balances and other instruments which allows you to recall and manage all relevant parameters and device functions. You can therefore simply connect KERN devices with KCP to computers, industrial control systems and other digital systems. In a large number of cases the KCP is compatible with the MT-SICS protocol. Only possible through data interface RS-232, other interfaces on request

Technical data

- Large LCD display, digit height 25 mm
- Weighing plate dimensions W×D×H
 - A** 1000×1000×108 mm
 - B** 1200×1000×108 mm
 - C** 1200×1500×108 mm
 - D** 1500×1500×108 mm
- Dimensions of display device W×D×H 268×115×80 mm
- Cable length of display device approx. 5 m
- Permissible ambient temperature -10 °C/40 °C

Accessories

- **Protective working cover**, scope of delivery: 5 items, KERN EOC-A01S05
- **Pair of base plates** to fix the weighing bridge to the floor, KERN BIC-A07
- **3 Ascending ramp**, steel, powder coated, for models with weighing plate size
 - A, B** KERN BIC-A01
 - C** KERN BIC-A02
 - D** KERN BIC-A03
- **4 Stable pit frame**, steel, powder coated, to install the weighing bridge so you can drive straight on, for models with weighing plate size
 - A** KERN BIC-A04
 - B** KERN BIC-A08
 - C** KERN BIC-A05
 - D** KERN BIC-A06
- **Benchtop stand incl. wall mount** for display device, **Benchtop stand incl. wall mount** for display device, KERN EOC-A04
- **Rechargeable battery pack internal**, operating time up to 43 h without backlight, charging time approx. 3 h, KERN KFB-A01
- **USB data interface**, for transferring weighing to the PC, printer, not possible in combination with verification, KERN KIB-A03

- **Bluetooth data interface** for wireless data transfer to PC or tablets, must be ordered at purchase, KERN KIB-A04
- **WiFi interface** for wireless connection of the balance to networks and WiFi capable devices, such as tablets, laptops or smartphones, must be ordered at purchase, please ask for delivery time, KERN KIB-A10
- **Ethernet data interface**, to connect an IP-based Ethernet network, must be ordered at purchase, not in combination with verification, KERN KIB-A02
- **Signal lamp, including interface**, for visual support of weighing with tolerance range, Factory Option, KERN KIB-A06
- **Alibi memory**, including USB interface for exporting weighing results to external data media such as USB sticks, hard disks, etc. Not in connection with calibration, KERN KIB-A01
- **Verification plug**, for verified balances this enables you to separate the display device and platform without affecting the verification, e.g. for installing the scale in a packing and dispatch table, pit frame etc. at a later date. Please order this at the same time as you purchase your scale, KERN KIB-A12


Note:

For verified scales the weighing bridge must be fixed to the floor. Optionally, with an access ramp, a footplate pair or a pit frame

In addition to the RS-232 data interface, which is integrated as standard, only one other data interface can be installed and operated

! Shipment via freight forwarder. Please ask for dimensions, gross weight, shipping costs

STANDARD



OPTION



FACTORY



Model	Weighing capacity [Max] kg	Readability = Verification value [d] = [e] kg	Minimal load [Min] kg	Net weight approx. kg	Weighing plate	Option			
						Verification	DAKKS Calibr. Certificate		
KERN						MID KERN		DAKKS KERN	
BID 600K-1SM	600	0,2	4	130	A	965-230		963-130	
BID 600K-1M	600	0,2	4	150	C	965-230		963-130	
BID 1T-4SM	1500	0,5	10	130	A	965-230		963-130	
BID 1T-4M	1500	0,5	10	75	C	965-230		963-130	
BID 1T-4EM	1500	0,5	10	65	B	965-230		963-130	
BID 1T-4LM	1500	0,5	10	80	D	965-230		963-130	
BID 3T-3M	3000	1	20	150	C	965-232		963-132	
BID 3T-3LM	3000	1	20	150	D	965-232		963-132	
Dual-range balance switches automatically to the next largest weighing capacity [Max] and readability [d]									
BID 600K-1DSM	300 600	0,1 0,2	4	130	A	965-230		963-130	
BID 600K-1DM	300 600	0,1 0,2	4	150	C	965-230		963-130	
BID 1T-4DSM	600 1500	0,2 0,5	10	130	A	965-230		963-130	
BID 1T-4DM	600 1500	0,2 0,5	10	150	C	965-230		963-130	
BID 3T-3DM	1500 3000	0,5 1	20	150	C	965-232		963-132	
BID 3T-3DLM	1500 3000	0,5 1	20	150	D	965-232		963-132	

Note: For applications that require verification, please order verification at the same time, initial verification at a later date is not possible.
Verification at the factory, we need to know the full address of the location of use.

NEW New model

* Verification not in combination with KERN KIB-A02, KIB-A03, KIB-A04, KIB-A10

Pictograms

	Internal adjusting: Quick setting up of the balance's accuracy with internal adjusting weight (motordriven)		KERN Communication Protocol (KCP): It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems		Protection against dust and water splashes IPxx: The type of protection is shown in the pictogram.
	Adjusting program CAL: For quick setting up of the balance's accuracy. External adjusting weight required				Stainless steel: The balance is protected against corrosion
	Easy Touch: Suitable for the connection, data transmission and control through PC, tablet or smartphone		GLP/ISO log: The balance displays serial number, user ID, weight, date and time, regardless of a printer connection		Suspended weighing: Load support with hook on the underside of the balance
	Memory: Balance memory capacity, e.g. for article data, weighing data, tare weights, PLU etc.		GLP/ISO log: With weight, date and time. Only with KERN printers		Battery operation: Ready for battery operation. The battery type is specified for each device
	Alibi memory: Secure, electronic archiving of weighing results, complying with the 2014/31/EU standard.				Rechargeable battery pack: Rechargeable set
	Data interface RS-232: To connect the balance to a printer, PC or network		Piece counting: Reference quantities selectable. Display can be switched from piece to weight		Universal mains adapter: with universal input and optional input socket adapters for A) EU, CH, GB; B) EU, CH, GB, USA; C) EU, CH, GB, USA, AUS
	RS-485 data interface: To connect the balance to a printer, PC or other peripherals. Suitable for data transfer over large distances. Network in bus topology is possible		Recipe level A: The weights of the recipe ingredients can be added together and the total weight of the recipe can be printed out		Mains adapter: 230V/50Hz in standard version for EU, CH. On request GB, USA or AUS version available
	USB data interface: To connect the balance to a printer, PC or other peripherals		Recipe level B: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display		Power supply: Integrated in balance. 230V/50Hz standard EU. More standards e.g. GB, USA or AUS on request
	Bluetooth* data interface: To transfer data from the balance to a printer, PC or other peripherals		Recipe level C: Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display, multiplier function, adjustment of recipe when dosages are exceeded or barcode recognition		Weighing principle: Strain gauges Electrical resistor on an elastic deforming body
	WLAN data interface: To transfer data from the balance to a printer, PC or other peripherals				Weighing principle: Tuning fork A resonating body is electromagnetically excited, causing it to oscillate
	Control outputs (optocoupler, digital I/O): To connect relays, signal lamps, valves, etc.		Totalising level A: The weights of similar items can be added together and the total can be printed out		Weighing principle: Electromagnetic force compensation Coil inside a permanent magnet. For the most accurate weighings
	Analogue interface: to connect a suitable peripheral device for analogue processing of the measurements		Percentage determination: Determining the deviation in % from the target value (100 %)		Weighing principle: Single cell technology: Advanced version of the force compensation principle with the highest level of precision
	Interface for second balance: For direct connection of a second balance		Weighing units: Can be switched to e.g. nonmetric units at the touch of a key. See balance model. Please refer to KERN's website for more details		Verification possible: The time required for verification is specified in the pictogram
	Network interface: For connecting the scale to an Ethernet network		Weighing with tolerance range: (Checkweighing) Upper and lower limiting can be programmed individually, e.g. for sorting and dosing. The process is supported by an audible or visual signal, see the relevant model		DAKkS calibration possible: The time required for DAKkS calibration is shown in days in the pictogram
	Wireless data transfer: between the weighing unit and the evaluation unit using an integrated radio module		Hold function: (Animal weighing program) When the weighing conditions are unstable, a stable weight is calculated as an average value		Package shipment: The time required for internal shipping preparations is shown in days in the pictogram
					Pallet shipment: The time required for internal shipping preparations is shown in days in the pictogram

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by KERN & SOHN GmbH is under license. Other trademarks and trade names are those of their respective owners.

KERN – Precision is our business

To ensure the high precision of your balance KERN offers you the the appropriate test weight in the international OIML error limit classes E1-M3 from 1 mg - 2500 kg. In combination with a DAKkS calibration certificate the best pre-requisite for proper balance calibration.

The KERN DAKkS calibration laboratory today is one of the most modern and best-equipped DAKkS calibration laboratories for balances, test weights and force-measurement in Europe.

Thanks to the high level of automation, we can carry out DAKkS calibration of balances, test weights and force-measuring devices 24 hours a day, 7 days a week.

Range of services:

- DAKkS calibration of balances with a maximum load of up to 50 t
- DAKkS calibration of weights in the range of 1 mg - 2500 kg
- Volume determination and measuring of magnetic susceptibility (magnetic characteristics) for test weights
- Database supported management of checking equipment and reminder service
- Calibration of force-measuring devices
- DAKkS calibration certificates in the following languages DE, GB, FR, IT, ES, NL, PL
- Conformity evaluation and reverification of balances and test weights

Your KERN specialist dealer: