

Product Catalogue 06/2022

Reliable cooling in the laboratory and health sector



Blood



Pharmaceutical



Laboratory



Temperature
Documentation

Table of Contents

Pioneer and market leader with a long tradition	4
Innovative cooling – built in Germany, produced for the world	6
Constant temperatures and optimum storage safety	8
Explosion protection at the highest level	10
The highest standards and sustainable solutions	12
Our three production lines	14
ULTIMATE	15
PRO ACTIVE	16
ESSENTIAL	17
Our complete product overview	18
Blood bank refrigerators and blood plasma freezers	20
Pharmaceutical refrigerators and freezers	26
Laboratory refrigerators and freezers	32
Temperature documentation with KIRSCH DATANET	44
Accessories	46

Dr. Kopitzke and employees at
the Willstätt location




Pioneer and market leader with a long tradition


The success story of our brand started in the year 1865, the year of its inception. Since it was established, we have been a family-run company and have continued to develop and increase our know-how over generations. Based on over 150 years of experience in appliance engineering and later in medical refrigerators and freezers, we are continually optimizing and extending our product range. We have always been synonymous with high-quality products that meet the most stringent standards and offer maximum reliability. Our customers today include pharmacies, hospitals, clinics, research institutes in the chemical and pharmaceutical industry, blood banks and laboratories in over 100 countries.



1865 Philipp Kirsch establishes his coppersmith firm

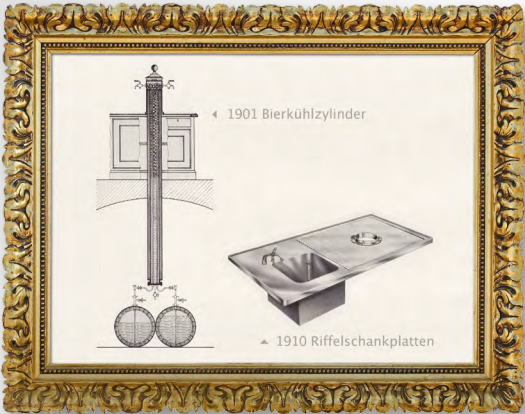

1901 Production of beer cooling cylinders and stainless steel drop-in basins



1927 Large trade business is transformed into an industrial factory



1929 Bottled beer refrigerators manufactured from galvanised steel sheet



1956 First electrical refrigerators



1970s Pharmaceutical refrigerators



2017 New plant in Willstätt



MED 100 PRO-ACTIVE



Innovative cooling – built in Germany, used all over the world

We take proven and reliable products to the next level. Our highly motivated development team is continuously setting high standards of product quality, functionality and efficiency.

We work in a sustainable, energy-saving and resource-efficient manner by using state-of-the-art technology and production methods. In addition, our restructured production concept speeds up product development and makes meaningful use of our capacities.

Company Kirsch is very active and engaged in DIN committees to help develop the future of cooling.. For example, we have developed a new cooling technology, called magnetocaloric, which operates entirely without refrigerant. As an innovation leader in this field, we are committed to bringing magnetocalorics to the market in the nearest future.



Gerhard Müller,
Head of Design

Constant temperatures and optimum storage safety

Temperature stability is a decisive factor in the safe storage of sensitive chilled goods. Thanks to perfectly matched components, our products offer the best cooling conditions and the most accurate temperature control in the world. This is achieved by our newly developed PRO-ACTIVE controller with two standard built-in PT-1000 sensors. Temperature deviations in the interior can therefore be minimised to just 1.5 °C from the warmest to the coldest point (confirmed by a DIN measurement, available for models BL, MED, LABO and LABEX).

The product monitoring and early pro-active warning system allows for convenient, stress free handling and fast response times which further increases safety. To guarantee this, every single one of our devices is precisely calibrated and tested in a trial run lasting several hours during final inspection. Another important benefit – in addition to the electronic control’s high degree of reliability – is the reduction of power consumption of up to 60% compared to previous controllers.



*The EU Quality Management System Certificate and the Conformity Statement can be found on our website.

The image shows the complete documentation.



Dr. Jochen Kopitzke,
CEO and owner



Explosion protection at the highest level

Kirsch is a specialist in the safe and precise storage of flammable substances. We offer laboratory refrigerators and freezers with explosion-proof interiors for application in the explosion protection zone 1 or 2 according to ATEX Directive 2017/34/EU. We stand behind our 100% safety guarantee of our products when used as intended. Our LABEX® models are designed to fulfill the strictest safety standards. The TÜV-certified safety concept with a technical report protects contents and operating personnel alike.



The highest standards and sustainable solutions

Quality assurance made easy: all important device data like data required for inspections by authorities, amongst others, can be accurately recorded and evaluated with the KIRSCH temperature documentation (standard on devices with PRO-ACTIVE control). A connection to the IT network enables live transmission of data, alarm forwarding to the PC as well as direct sending of warnings by email. Thanks to automatic data capture, our customized digital solutions are extremely resource-efficient. And more importantly: if in doubt, they serve as a reliable source of information to determine whether a certain chilled good can still be used. Our ISO-certified KIRSCH refrigerators and freezers are ideally designed especially for areas with the strictest cooling requirements. We use stable processes to ensure maximum safety and quality of our devices and services.

In addition to complying with the highest quality standards, we also consider sustainability to be a very important topic. All our products are designed for a long service life. This helps to preserve our planet's natural resources and means cost savings for our customers. At the same time, we have been able to permanently reduce power consumption as well as our noise emissions to far below the limit. With these measures, we are promoting the sustainable development of Philipp Kirsch GmbH, which is at the core of our company philosophy.



We are pleased to present you
our three product lines

ULTIMATE

ULTIMATE

PROACTIVE

ESSENTIAL



- Elegant glass design
- Simple operation via a capacitive touch display (also with laboratory gloves)
- Access control with a log
- Graphical display of the temperature curve and min/max temperature
- Digital data documentation with KIRSCH Datamet software
- Intuitive help with alarm messages and troubleshooting in plain text
- Operation via remote control is possible
- Includes the benefits of the PRO-ACTIVE line

PROACTIVE



- Reduction of power consumption by up to 60 % compared to previous controllers
- Tamper-proof thanks to key switch
- Data storage for USB export
- Fast response time to imminent malfunctions thanks to pro-active alarming
- Reduction of temperature deviation
- Highest storage safety due to PT1000 monitoring
- Optimally matched components
- The benefits of the ESSENTIAL line include

ESSENTIAL



- Your entry into KIRSCH quality
- Maximum reliability
- Durable
- Temperature stability
- Flexibility
- Maximum safety

Discover our entire
product range



flexible

efficient

sustainable



Blood bank
refrigerators and
blood plasma freezers



Pharmaceutical
refrigerators and freezers



Laboratory refrigerators
and freezers



Temperature
documentation

BLOOD

PHARMACEUTICALS

LABORATORY

DOCUMENTATION



Blood bank refrigerators compliant with DIN 58371

Blood plasma freezers compliant with DIN 58375

- Blood bank refrigerators and blood plasma freezers, certified according to Regulation (EU) 2017/745 (MDR). In order to offer patients and users of our devices the highest possible level of protection, we implemented that regulation before the end of the transition period in 2024
- Medical device class IIa according to regulation (EU) 2017/745 (MDR)
- Blood reserves are stored at +4°C compliant with DIN 58371
- Blood plasma is stored at at least -31 °C compliant with DIN 58375

(Sold only through authorised dealers)



FROSTER BL 180 PRO-ACTIVE



FROSTER BL 330 PRO-ACTIVE



BL 520 ULTIMATE

BLOOD

Blood bank refrigerators

Reg. 2017/745 EU (MDR),
Class IIa




ULTIMATE PRO-ACTIVE	— BL 100 PRO-ACTIVE	— BL 176 PRO-ACTIVE	BL 300 ULTIMATE BL 300 PRO-ACTIVE	BL 520 ULTIMATE BL 520 PRO-ACTIVE	BL 720 ULTIMATE BL 720 PRO-ACTIVE
PC-KIT-NET			Standard on the ULTIMATE,	optional on the PRO-ACTIVE	
Capacity	95 l	170 l	280 l	500 l	700 l
Temperature setting	+4 °C	+4 °C	+4 °C	+4 °C	+4 °C
Voltage	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	optional	optional	optional	optional	optional
Power consumption (in watts)	92	120	95	250	250
Normal consumption (in kWh/24 h)	0.64	1.22	0.63	1.5	1.56
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C
Heat emission (max. in watts)	195	187	170	554	554
Weight	net 48 kg/gross 57 kg	net 77 kg/gross 87 kg	net 81 kg/gross 93 kg	net 138 kg/gross 161 kg	net 164 kg/gross 190 kg
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	54 x 54 x 82	70 x 77 x 122	68 x 72 x 131.5	77 x 76 x 195.5	77 x 98 x 195.5
Usable dimension (W x D x H in cm)	39.5 x 34 x 34	51 x 34.5 x 46	49 x 39 x 92 (usable depth at the bottom 15 cm less)	56 x 39.5 x 92	56 x 60.5 x 129
Exterior dimensions with door open at 90° (W x D in cm)	54 x 106	70 x 136	67 x 133	77 x 144	77 x 166
Drawer inner dimensions (W x D x H in cm)	39.5 x 34 x 10	51 x 34.5 x 10	49 x 39 x 10 top drawers 51 x 31 x 10 bottom drawer	56 x 39.5 x 10	56 x 60.5 x 10
Capacity per drawer (500 ml blood bags)	30	38	43	49	81
Max. load: drawer	25 kg	50 kg	50 kg	50 kg	50 kg
Noise emission (for Ecool R600a)	40.5 dB (A)	38.6 dB (A)	40.3 dB (A)	41.2 dB (A)	41.8 dB (A)
Automatic defrost	✓	✓	✓	✓	✓
Defrost water container for manual draining	optional	optional	optional	optional	optional
Temperature deviation Δ T compliant with DIN 58371 without defrosting	0.9 °C	0.3 °C	0.8 °C	1.1 °C	1.2 °C
Re-circulating air cooling	✓	✓	✓	✓	✓
Alerts in case of power failure	✓	✓	✓	✓	✓
Glass door with lock	optional	—	optional	optional	optional
Equipped with castors	optional	optional	optional	✓	✓
External housing – chrome-nickel steel 4301	—	—	—	optional	optional
Tabletop	optional	—	—	—	—
Door coupling fitting	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	✓	optional	optional	✓	✓
Refrigerating machine, water-cooled*	—	—	—	optional	optional
LED lighting strip mounted on the roof/on the side wall of the interior	optional/—	optional/—	optional/—	—/optional	—/optional
Adjustment gibs/variable interior arrangement	—	—	✓	✓	✓
Aluminium drawer with roller runners (standard/maximum)	2/2	2/3	4/5	5/8	5/8
Stainless steel drawer with roller runners	—	optional	optional	optional	optional
Drawer insert in a set	—	optional	optional	optional	optional
Vario Support	—	—	optional	optional	optional
Shelf with overlays or rails	—	—	optional	optional	optional
Wire basket with rails	—	—	—	optional	optional

*On request



BLOOD

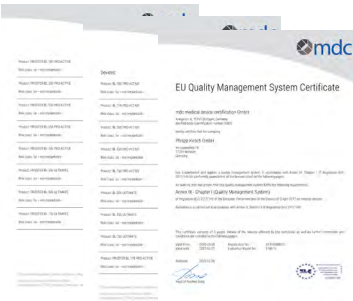

MDR-certified Medical devices

Medical devices class IIa, certified according to Regulation (EU) 2017/745 (MDR) by mdc medical device certification GmbH (CE0483)*.



Future-proof & reliable

With the validity of the MDR certificate until March 2027, we guarantee the uninterrupted supply of the blood cooling devices even after the expiry of the MDD transition deadline in 2024.



Reliable blood storage

By certifying our blood cooling devices we contribute to better protection of the public health and patient safety.



Blood bank refrigerators

More information can be found on our website.



*MDR certificate

You will find the certificate on our website.

Blood plasma
freezers

Reg. 2017/745 EU (MDR),
Class IIa



ULTIMATE	—	—	FROSTER BL 330 ULTIMATE	FROSTER BL 530 ULTIMATE	—	FROSTER BL 730 ULTIMATE
PRO-ACTIVE	FROSTER BL 178 PRO-ACTIVE	FROSTER BL 180 PRO-ACTIVE	FROSTER BL 330 PRO-ACTIVE	FROSTER BL 530 PRO-ACTIVE	FROSTER BL 650 PRO-ACTIVE	FROSTER BL 730 PRO-ACTIVE
PC-KIT-NET			Standard on the ULTIMATE,		optional on the PRO-ACTIVE	
Capacity	170 l	170 l	300 l	500 l	650 l	700 l
Temperature setting	approx. -32 °C	approx. -41 °C	approx. -32 °C	approx. -32 °C	approx. -41 °C	approx. -32 °C
Voltage	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	optional	optional	optional	optional	—	optional
Power consumption (in watts)	500	453	550	740	990	790
Normal consumption (in kWh/24 h)	4.88	6.54	6.59	10.81	14.32	11.1
Permitted ambient temperature	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C
Heat emission (max. in watts)	633	489	713	827	1010	860
Weight	net 111 kg/gross 124 kg	net 100 kg/gross 110 kg	net 120 kg/gross 135 kg	net 168 kg/gross 191 kg	net 220 kg/gross 260 kg	net 188 kg/gross 214 kg
Overall dimensions (including distance from wall and door handle) (W x D x H in cm)	70 x 77 x 122	70 x 77 x 122	74 x 78 x 166/74 x 77 x 159	77 x 76 x 195.5	83 x 102 x 197	77 x 97 x 195.5
Usable dimensions (W x D x H in cm)	51 x 34.5 x 46	52 x 32 x 46	54 x 37 x 80	56 x 39.5 x 129	59 x 56 x 114	56 x 60.5 x 129
Exterior dimensions with door open at 90° (W x D in cm)	70 x 136	70 x 136	74 x 142	77 x 144	86 x 177	77 x 166
Drawer inner dimensions (W x D x H in cm)	51 x 34.5 x 10	52 x 32 x 15.5	54 x 37 x 10	56 x 39.5 x 10	59 x 56 x 22 top drawer; 59 x 62 x 22 bottom four drawers	56 x 60.5 x 10
Capacity per drawer (plasma cartons W x D x H: 13.5 x 2x5 x 16.5 in cm)	45	44	52	60	96	92
Max. load: drawer	50 kg	50 kg	50 kg	50 kg	50 kg	50 kg
Noise emission	50.3 dB (A)	51.2 dB (A)	50.4 dB (A)	51.5 dB (A)	62.3 dB (A)	49.7 dB (A)
Automatic defrost	✓	✓	✓	✓	✓	✓
Defrost water container for manual draining	—	—	optional	optional	—	optional
Temperature deviation Δ T compliant with DIN 58375 without defrosting	1.3 °C	1.7 °C	1.5 °C	1.68 °C	1.77 °C	1.68 °C
Re-circulating air cooling	✓	✓	✓	✓	✓	✓
Alerts in case of power failure	✓	✓	✓	✓	✓	✓
Equipped with castors	optional	optional	optional	✓	optional	✓
External housing – chrome-nickel steel 4301	—	—	—	optional	—	optional
Refrigerating machine, water-cooled*	—	—	—	optional	—	optional
LED lighting strip mounted on the roof/on the side wall of the interior	optional/—	—/—	optional/—	—/optional	—/—	—/optional
Adjustment gibs/variable interior arrange- ment	—	—	✓	✓	—	✓
Aluminium drawer with roller runners (standard/maximum)	3/3	—	4/5	5/8	—	5/8
Stainless steel drawer with roller runners (standard/maximum)	optional	3/3	optional	optional	5/5	optional
Drawer insert in a set	optional	optional	optional	optional	optional	optional
Vario Support	—	—	optional	optional	—	optional
Shelf with overlays or rails	—	—	optional	optional	—	optional
Wire basket with rails	—	—	optional	optional	—	optional

*On request



Blood Plasma
Freezers

More information
can be found on
our website.



Pharmaceutical refrigerators* and freezers

*compliant with DIN 13277 (replaces DIN 13221)

- Safe storage of pharmaceuticals and vaccines
- High-performance cooling machine for maximum temperature constancy even if the door has been opened for a longer period of time
- Data storage for USB export
- Aluminium interior container
- KIRSCH ergonomics Concept
- High energy efficiency
- Environmentally friendly refrigerant R600a
- Tamper-proof thanks to key switch
- Easy access
- Height-adjustable drawers or shelves
- Automatic defrost



MED 100 PRO-ACTIVE



MED 340 PRO-ACTIVE



MED 520 ULTIMATE

Plastic drawers are currently available only in black color.

Pharmaceutical
refrigerators

compliant with DIN 13277



ULTIMATE	—	—	—	—	—	MED 288 ULTIMATE	MED 340 ULTIMATE
PRO-ACTIVE	—	MED 100 PRO-ACTIVE	—	MED 126 PRO-ACTIVE	MED 200 PRO-ACTIVE	MED 288 PRO-ACTIVE	MED 340 PRO-ACTIVE
ESSENTIAL	ESSENTIAL MED 85 DIN	—	ESSENTIAL MED 125	—	—	—	—
PC-KIT-NET	Standard on the ULTIMATE, optional on the PRO-ACTIVE, not available on the ESSENTIAL						
compliant with DIN 13277	✓	✓	✓	✓	✓	✓	✓
Capacity	80 l	95 l	120 l	120 l	170 l	280 l	330 l
Temperature setting	approx. +2 to +15 °C	approx. 2 to +15 °C	approx. +2 to +15 °C	approx. +2 to +15 °C	approx. 2 to +15 °C	approx. 2 to +15 °C	approx. +2 to +15 °C
Voltage	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	optional	optional	optional	optional	optional	optional	optional
Power consumption (in watts)	112	75	115	105	145	100	108
Normal consumption (in kWh/24 h)	0.69	0.3	1.28	0.58	0.98	0.69	0.82
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C
Heat emission (max. in watts)	172	183	190	183	171	173	165
Weight	net 34 kg/gross 40 kg	net 47 kg/gross 56 kg	net 43 kg/gross 50 kg	net 49 kg/gross 58 kg	net 69 kg/gross 80 kg	net 75 kg/gross 87 kg	net 100 kg/gross 114 kg
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	48 x 51 x 74	54 x 54 x 82	54 x 53.5 x 81	54 x 53.5 x 88.8	54 x 55.7 x 122	67 x 72 x 132	67 x 66 x 189
Usable dimensions (W x D x H in cm)	34 x 32 x 63 (usable depth at the bottom 15 cm less)	40.8 x 32 x 34	40.8 x 32 x 59 (usable depth at the bottom 15 cm less)	40.8 x 32 x 59 (usable depth at the bottom 15 cm less)	38 x 34 x 72	50.4 x 32 x 92 (usable depth at the bottom 15 cm less)	50.4 x 32 x 116
Exterior dimensions with door open at 90° (W x D in cm)	47 x 96	54 x 105.5	54 x 105.5	54 x 105.5	54 x 105	67 x 130	67 x 124
Drawer inner dimensions (W x D x H in cm)	34 x 32 x 5.6	40.8 x 32 x 5.6	40.8 x 32 x 5.6	40.8 x 32 x 5.6	38 x 34 x 5.6	50.4 x 32 x 5.6	50.4 x 32 x 5.6/—
Maximum load: drawer/shelf	9.5 kg/25 kg	13 kg/25 kg	13 kg/25 kg	13 kg/25 kg	13 kg/25 kg	16 kg/40 kg	16 kg/40 kg
Noise emission (for Ecool R600a)	49 dB (A)	41 dB (A)	42 dB (A)	38 dB (A)	48 dB (A)	41 dB (A)	39 dB (A)
Automatic defrost	✓	✓	✓	✓	✓	✓	✓
Defrost water container for manual draining	optional	optional	optional	optional	optional	optional	optional
Temperature deviation Δ T compliant with DIN 13277 without defrosting	0.8 °C	0.48 °C	1.5 °C	1.5 °C	1.38 °C	1 °C	1.75 °C
Re-circulating air cooling	✓	✓	✓	✓	✓	✓	✓
Alerts in case of power failure	✓	✓	✓	✓	✓	✓	✓
Glass door with lock	—	optional	—	—	—	optional	optional
Glass door	—	—	optional (no longer DIN 13277-compliant)	optional (no longer DIN 13277-compliant)	—	—	—
Equipped with castors	optional	optional	optional	optional	optional	optional	optional
Tabletop	—	optional	optional	—	optional	—	—
Decorative frame	optional	optional	optional	optional	optional	optional	optional
Digital temperature display prepared for external installation into furniture front	optional	✓	optional	✓	✓	—	—
Door coupling fitting	optional	optional	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	optional	✓	optional	optional	✓	optional	optional
LED lighting strip mounted on the roof of the interior	—	optional	optional	optional	optional	optional	optional
Plastic drawer incl. drawer insert (standard/maximum)	3/3	3/3	3/3	3/3	—	—	—
Plastic drawer with roller runners + drawer insert (standard/maximum)	—	—	—	—	4/5	5/8	9/12
Vario Support	—	—	—	—	—	optional	optional
Top drawer is lockable	optional	—	optional	optional	—	optional	optional
Shelf	1	1	1	1	—	—	—
Shelf with overlays/rails	—/—	—/—	—/—	—/—	1/—	optional/optional	optional/optional

*On request

Pharmaceutical
refrigerators* and
freezers

*compliant with DIN 13277



ULTIMATE	MED 468 ULTIMATE	MED 520 ULTIMATE	–	MED 720 ULTIMATE	–	–
PRO-ACTIVE	MED 468 PRO-ACTIVE	MED 520 PRO-ACTIVE	MED 600 PRO-ACTIVE*	MED 720 PRO-ACTIVE	–	FROSTER MED 95 PRO-ACTIVE
ESSENTIAL	–	–	–	–	ESSENTIAL FROSTER 70	–
PC-KIT-NET	Standard on the ULTIMATE, optional on the PRO-ACTIVE,			not available on the ESSENTIAL		
compliant with DIN 13277	✓	✓	✓	✓	–	–
Capacity	460 l	500 l	600 l	700 l	70 l	95 l
Temperature setting	approx. 2 to +15 °C	approx. +2 to +15 °C	approx. +2 to +15 °C	approx. 2 to +15 °C	approx. -15 to -22 °C	approx. -5 to -25 °C
Voltage	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	optional	optional	optional	optional	optional	optional
Power consumption (in watts)	190	260	340	250	100	123
Normal consumption (in kWh/24 h)	0.91	1.5	3.20	1.55	1.98	1.33
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +32 °C	from +10 °C to +32 °C
Heat emission (max. in watts)	293	560	447	533	129	162
Weight	net 132 kg/gross 146 kg	net 145 kg/gross 168 kg	net 186kg/gross 219 kg	net 164 kg, gross 190 kg	net 35 kg/gross 42 kg	net 50 kg/gross 59 kg
Overall dimensions (including distance from wall and door handle) (W x D x H in cm)	74 x 77.5 x 189	77 x 76 x 195.5	51 x 100 x 212 - 215	77 x 98 x 195.5	47 x 51 x 74	54 x 54 x 82
Usable dimensions (W x D x H in cm)	57.3 x 43 x 116	57.3 x 39 x 129	33 x 33.6 x 145	56.3 x 59.5 x 129	35 x 31 x 60 (usable depth at the bottom 15 cm less)	43 x 36 x 34
Exterior dimensions with door open at 90° (W x D in cm)	74 x 142	77 x 144	51 x 164 (with drawers open)	77 x 165	47 x 96	54 x 105.5
Drawer/shelf inner dimensions (W x D x H in cm)	57.3 x 43 x 5.6/–	57.3 x 39 x 5.6/–	2x 33 x 33.6 x 7.3/–	56.3 x 59.5 x 5.6/–	–/35 x 31 cm above, 35 x 20 cm below	40.8 x 32 x 5.6 /43 x 36 cm
Maximum load: drawer/shelf	24 kg/40 kg	24 kg/40 kg	22 kg/–	24 kg/40 kg	–/25 kg	13 kg/25 kg
Noise emission (for Ecoool R600a)	40 dB (A)	42 dB (A)	42 dB (A)	42 dB (A)	39.9 dB (A)	38 dB (A)
Automatic defrost	✓	✓	✓	✓	–	–
Defrost water container for manual draining	optional	optional	–	optional	–	✓
Temperature deviation Δ T compliant with DIN 13277 without defrosting	1.5 °C	1.6 °C	3.13 °C	1.8 °C	3.3 °C	1,6 °C
Re-circulating air cooling	✓	✓	✓	✓	–	–
Alerts in case of power failure	✓	✓	✓	✓	–	✓
Glass door with lock	optional	optional	–	optional	–	–
Equipped with castors	optional	✓	–	✓	optional	optional
External housing - chrome-nickel steel 4301	–	optional	–	optional	–	–
Tabletop	–	–	–	–	–	optional
Decorative frame	optional	optional	optional	optional	optional	optional
Digital temperature display prepared for external installation into furniture front	–	–	✓	–	–	✓
Door coupling fitting	optional	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	✓	✓	✓	✓	optional	✓
Refrigerating machine, water-cooled*	–	optional	–	optional	–	–
LED lighting strip mounted on the side wall of the interior	optional	optional	–	optional	–	–
Plastic drawer incl. drawer insert (standard/maximum)	–	–	–	–	–	1/3
Plastic drawer with roller runners + drawer insert (standard/maximum)	10/12	12/12	12/12	12/12	–	–
Top drawer is lockable	optional	optional	–	–	–	–
Vario Support	optional	optional	–	optional	–	–
Shelf	–	–	–	–	4	2
Shelf with overlays or rails	optional	optional	–	optional	–	–
Wire basket with rails	optional	optional	–	optional	–	–

*On request



Pharmaceutical
refrigerators

More information
can be found on
our website.



Pharmaceutical
freezers

More information
can be found on
our website.

Laboratory refrigerators* and freezers

*compliant with DIN 13277 (replaces DIN 13221)
also with explosion-proof interior

- Safe storage of pharmaceuticals and vaccines
- High-performance cooling machine for maximum temperature constancy even if the door has been opened for a longer period of time
- Data storage for USB export
- KIRSCH Ergonomics Concept
- Tamper-proof thanks to key switch
- Aluminium interior container
- High energy efficiency
- Environmentally friendly, high-pressure foam insulation
- Environmentally friendly refrigerant R600a
- Easy access
- Height-adjustable drawers or shelves
- Automatic defrost

(depending on the model)



LABO 100 PRO-ACTIVE



LABO 340 PRO-ACTIVE



LABO 720 CHROMAT ULTIMATE



Laboratory refrigerators

*compliant with DIN 13277



ULTIMATE	—	—	—	LABO 288 ULTIMATE	LABO 340 ULTIMATE	LABO 468 ULTIMATE	LABO 520 ULTIMATE
PRO-ACTIVE	LABO 100 PRO-ACTIVE	—	LABO 126 PRO-ACTIVE	LABO 288 PRO-ACTIVE	LABO 340 PRO-ACTIVE	LABO 468 PRO-ACTIVE	LABO 520 PRO-ACTIVE
ESSENTIAL	—	ESSENTIAL 125	—	—	—	—	—
PC-KIT-NET	Standard on the ULTIMATE, optional on the PRO-ACTIVE, not available on the ESSENTIAL						
compliant with DIN 13277	✓	—	✓	✓	✓	✓	✓
Capacity	95 l	120 l	120 l	280 l	330 l	460 l	500 l
Temperature setting	approx. 2 to +15 °C	approx. +2 to +15 °C	approx. +2 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C
Voltage	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	optional	optional	optional	optional	optional	optional	optional
Power consumption (in watts)	76	125	100	88	110	170	250
Normal consumption (in kWh/24 h)	0.64	0.55	0.61	0.68	0.65	1.00	1.40
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C
Heat emission (max. in watts)	184	123	181	165	166	280	553
Weight	net 44 kg/gross 53 kg	net 39 kg/gross 48 kg	net 49 kg/gross 58 kg	net 71 kg/gross 83 kg	net 90 kg/gross 104 kg	net 113 kg/gross 127 kg	net 125 kg/gross 148 kg
Overall dimensions (including distance from wall and door handle) (W x D x H in cm)	54 x 54 x 82	54 x 53.5 x 81	54 x 53.5 x 88.8	67 x 72 x 132	67 x 66 x 189	74 x 77.5 x 189	77 x 76 x 195,5
Usable dimensions (W x D x H in cm)	43 x 33 x 34	43 x 33 x 59 (usable depth at the bottom 15 cm less)	43 x 33 x 59 (usable depth at the bottom 15 cm less)	52.7 x 39 x 92 (usable depth at the bottom 15 cm less)	52.7 x 39 x 116	59 x 50 x 116	59 x 45 x 129
Exterior dimensions with door open at 90° (W x D in cm)	54 x 106	54 x 106	54 x 106	67 x 130	67 x 124	74 x 142	74 x 144
Drawer/shelf inner dimensions (W x D x H in cm)	40.8 x 32 x 5.6/ 43 x 33	—/43 x 33	—/43 x 33	—/52.7 x 39	50.4 x 32 x 5.6/ 52.7 x 39	—/59 x 50	—/59 x 45
Maximum load: drawer/shelf	13 kg/25 kg	13 kg/25 kg	13 kg/25 kg	16 kg/40 kg	16 kg/40 kg	24 kg/40 kg	—/40 kg
Noise emission (for Ecoool R600a)	41 dB (A)	41.4 dB (A)	38 dB (A)	41 dB (A)	39 dB (A)	41 dB (A)	42 dB (A)
Automatic defrost	✓	✓	✓	✓	✓	✓	✓
Defrost water container for manual draining	optional	optional	optional	optional	optional	optional	optional
Temperature deviation Δ T compliant with DIN 13277 without defrosting	1.76 °C	2.25 °C	1.3 °C	1.01 °C	0.54 °C	1 °C	1 °C
Re-circulating air cooling	✓	—	✓	✓	✓	✓	✓
Alerts in case of power failure	—	optional	—	✓	✓	✓	✓
Glass door with lock/glass door	optional/—	—/optional	—/optional	optional/—	optional/—	optional/—	optional/—
Equipped with castors	optional	optional	optional	optional	optional	optional	✓
External housing - chrome-nickel steel 4301	—	—	—	—	—	—	optional
Tabletop	optional	optional	—	—	—	—	—
Digital temperature display prepared for external installation into furniture front	✓	optional	optional	—	—	—	—
Door coupling fitting/decorative frame	optional	optional	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	✓	optional	optional	optional	optional	✓	✓
Refrigerating machine, water-cooled*	—	—	—	—	—	—	optional
LED lighting strip mounted on the roof/on the side wall of the interior	optional/—	optional/—	optional/—	optional/—	—/optional	—/optional	—/optional
Flexible equipment is possible	✓	✓	✓	✓	✓	✓	✓
Plastic drawer	optional	optional	optional	—	—	—	optional
Plastic drawer with roller runners	—	—	—	optional	1 standard/optionally up to 12	optional	optional
Aluminium drawer with roller runners	—	—	—	optional	optional	—	optional
Stainless steel drawer with roller runners	—	—	—	optional	—	—	optional
Vario Support	—	—	—	optional	optional	optional	optional
Shelf	2	2	2	—	—	—	optional
Shelf with overlays/rails	—/—	—/—	—/—	3/optional	4/optional	4/optional	5/optional
Wire basket with rails	—	—	—	—	—	optional	optional

*On request

Laboratory refrigerators and freezers

*compliant with DIN 13277



Chromatography refrigerator



ULTIMATE	LABO 720 ULTIMATE	LABO 720 CHROMAT ULTIMATE	FROSTER LABO 330 ULTIMATE	FROSTER LABO 530 ULTIMATE	FROSTER LABO 730 ULTIMATE
PRO-ACTIVE	LABO 720 PRO-ACTIVE	LABO 720 CHROMAT PRO-ACTIVE	FROSTER LABO 330 PRO-ACTIVE	FROSTER LABO 530 PRO-ACTIVE	FROSTER LABO 30 PRO-ACTIVE
PC-KIT-NET			Standard on the ULTIMATE,		optional on the PRO-ACTIVE
compliant with DIN 13277	✓	✓	–	–	–
Capacity	700 l	700 l	300 l	500 l	700 l
Temperature setting	approx. 0 to +15 °C	approx. +4 to +15 °C	approx. -10 to -30 °C	approx. -10 to -30 °C	approx. -10 to -30 °C
Voltage	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	optional	optional	optional	optional	optional
Power consumption (in watts)	250	250	550	610	620
Normal consumption (in kWh/24 h)	1.46	1.63	4.62	8.67	8.31
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C
Heat emission (max. in watts)	553	553	693	753	753
Weight	net 141 kg/gross 167 kg	net 146 kg/gross 174 kg	net 125 kg/gross 142 kg	net 140 kg/gross 163 kg	net 157 kg/gross 183 kg
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	77 x 98 x 195.5	77 x 98 x 195.5	74 x 77 x 166/74 x 77 x 159	77 x 76 x 195.5	77 x 97 x 195.5
Usable dimensions (W x D x H in cm)	59 x 65 x 129	59 x 65 x 129	57 x 42 x 80	59 x 45 x 129	59 x 65 x 129
Exterior dimensions with door open at 90° (W x D in cm)	77 x 165	77 x 165	74 x 141	77 x 144	77 x 165
Shelf inner dimensions (W x T in cm)	59 x 65	59 x 65	57 x 42	59 x 45	59 x 65
Maximum load: shelf	40 kg	40 kg	40 kg	40 kg	40 kg
Noise emission (for Ecool R600a in refrigerators)	42 dB (A)	42 dB (A)	59 dB (A)	53 dB (A)	53 dB (A)
Automatic defrost	✓	✓	✓	✓	✓
Defrost water container for manual draining	optional	optional	optional	optional	optional
Temperature deviation Δ T compliant with DIN 13277 without defrosting	0,86 °C	1.1 °C	2.0 °C	2.7 °C	2.0 °C
Re-circulating air cooling	✓	✓	✓	✓	✓
Alerts in case of power failure	✓	✓	✓	✓	✓
Glass door with lock	optional	✓	–	–	–
Equipped with castors	✓	✓	optional	✓	✓
External housing – chrome-nickel steel 4301	optional	optional	–	optional	optional
Refrigerating machine fan, built-in	✓	✓	✓	✓	✓
Refrigerating machine, water-cooled*	optional	optional	–	optional	optional
LED lighting strip mounted on the roof/on the side wall of the interior	–/optional	–/✓	optional/–	–/optional	–/optional
Flexible equipment is possible	✓	✓	✓	✓	✓
Plastic drawer with roller runners	optional	optional	–	optional	optional
Aluminium drawer with roller runners	optional	optional	optional	optional	optional
Stainless steel drawer with roller runners	optional	optional	optional	optional	optional
Vario Support	optional	optional	optional	optional	optional
Shelf with overlays/rails	5/optional	5/optional	4/optional	5/optional	5/optional
Wire basket with rails	optional	optional	optional	optional	optional

*On request



Display at eye-level

The display is positioned at eye-level to make it easier to read and use.



Easy access

The well thought-out opening mechanism makes it even simpler to equip our devices.



Self-closing door

Doors that are “open by accident” are a thing of the past.



Flexible arrangement

Gibs (every 15 mm) for flexible interior arrangement.

More information can be found on our website:

Laboratory refrigerators



Laboratory freezers



Explosion protection

Our promise - your safety!



KIRSCH was the first company in the laboratory cooling sector to adapt to the new ATEX product directive 2014/34/EU.

The interior of the devices is tested for absence of ignition sources by TÜV SÜD in conformity with Directive ATEX 2014/34/EU:

- All of the electrical equipment and components used in the interior (fans, temperature sensors, etc.) are specifically designed for use in zone 1* and zone 2.
- We also guarantee the maximum temperature stability in explosion-proof interiors.
- Intrinsically safe supply to the temperature sensors in the interior
- Explosion-proof fan
- Special earthing concept for discharging electrical potential
- Plastic parts in the interior have an antistatic design

(depending on the model)

*LABEX 465

Liability according to ATEX operator- and product guidelines

According to the ATEX operating directive, the plant operator is responsible for the correct selection of the equipment. For the determination of the suitable EX zone (e.g. Zone 1, Zone 2), following explosion hazards, among other things, have to be taken into consideration: the explosiveness of the stored substances and the frequency of occurrence of an explosive atmosphere.

We will gladly assist you in selecting the correct explosion protected device and provide you with the technical report of the TÜV-SÜD. You will find the declaration of conformity on our website: kirsch-medical.com/certificates/explosion-proofness.

LABEX®-Devices

Our LABEX® models are the safest explosion-proof devices on the market that offer maximum temperature stability.

INTRINSIC SAFETY



Protected probes
The probes are protected via safety barriers



Explosion-proof fan
with ATEX power cable and energy limiting power supply.

CONSTRUCTIVE SAFETY



Earthing concept
The user is grounded as soon as the door handle is touched. Static charge is discharged into the housing.



No spark formation
caused by moving parts (shelves or conductive drawers)

ZONE 1

For usage in more demanding environment and storage of highly flammable/explosive substances, we offer even safer unique Zone 1 devices. Though without of internal fan, the units offer remarkably good temperature homogeneity.

Laboratory refrigerators with an explosion-proof interior



ULTIMATE	—	LABEX 288 ULTIMATE	LABEX 340 ULTIMATE	—	LABEX 468 ULTIMATE	LABEX 520 ULTIMATE	LABEX 720 ULTIMATE
PRO-ACTIVE	LABEX 105 PRO-ACTIVE	LABEX 288 PRO-ACTIVE	LABEX 340 PRO-ACTIVE	LABEX 465 PRO-ACTIVE	LABEX 468 PRO-ACTIVE	LABEX 520 PRO-ACTIVE	LABEX 720 PRO-ACTIVE
EX protection zone	2	2	2	1	2	2	2
PC-KIT-NET	Standard on the ULTIMATE, optional on the PRO-ACTIVE						
compliant with DIN 13277	—	✓	✓	✓	✓	✓	✓
Capacity	95 l	280 l	330 l	460 l	460 l	500 l	700 l
Temperature setting	approx. +2 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C
Voltage	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	optional	optional	optional	optional	optional	optional	optional
Power consumption (in watts)	86	100	128	150	170	234	237
Normal consumption (in kWh/24 h)	0.43	0.76	1.14	0.76	1.03	1.2	1.23
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C
Heat emission (max. in watts)	191	173	178	280	280	543	545
Weight	net 46 kg, gross 55 kg	net 75 kg/gross 87 kg	net 95 kg/gross 109 kg	net 120 kg/gross 134 kg	net 120 kg/gross 134 kg	net 126 kg/gross 149 kg	net 143 kg/gross 169 kg
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	54 x 54 x 82	67 x 72 x 132	67 x 66 x 189	74 x 76 x 176	74 x 77.5 x 189	77 x 76 x 195.5	77 x 98 x 195.5
Usable dimensions (W x D x H in cm)	43 x 36 x 43	52.7 x 39 x 92 (usable depth at the bottom 15 cm less)	52.7 x 39 x 116	-/57 x 43 x 122	59 x 50 x 116	59 x 45 x 129	59 x 65 x 129
Exterior dimensions with door open at 90° (W x D in cm)	54 x 106	67 x 130	67 x 124	74 x 140	74 x 142	77 x 144	77 x 165
Drawer/shelf inner dimensions (W x D x H in cm)	40.8 x 32 x 5.6/ 43 x 36	50.4 x 32 x 5.6/ 52.7 x 39	50.4 x 32 x 5.6/ 52.7 x 39	57 x 43 x 5.6	57.3 x 43 x 5.6/ 59 x 50	59 x 45	59 x 65
Maximum load: drawer/shelf	13 kg/25 kg	16 kg/40 kg	16 kg/40 kg	24 kg/40 kg	24 kg/40 kg	24 kg/40 kg	-/40 kg
Noise emission (for Ecool R600a)	48 dB (A)	40 dB (A)	40 dB (A)	40 dB (A)	40 dB (A)	41 dB (A)	42 dB (A)
Automatic defrost	✓	✓	✓	✓	✓	✓	✓
Defrost water container for manual draining	✓	✓	✓	✓	✓	✓	✓
Temperature deviation Δ T compliant with DIN 13277 without defrosting	5.71 °C	0.74 °C	1.32 °C	1 °C	1 °C	0.9 °C	1 °C
Re-circulating air cooling	—	✓	✓	✓	✓	✓	✓
Alerts in case of power failure	✓	✓	✓	✓	✓	✓	✓
Glass door with lock	optional	optional	optional	optional	optional	optional	optional
Equipped with castors	optional	optional	optional	optional	optional	✓	✓
External housing – chrome-nickel steel 4301	—	—	—	—	—	optional	optional
Tabletop	optional	—	—	—	—	—	—
Decorative frame	optional	optional	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	✓	optional	optional	✓	✓	✓	✓
Refrigerating machine, water-cooled*	—	—	—	—	—	optional	optional
Flexible equipment is possible	✓	✓	✓	✓	✓	✓	✓
Plastic drawer (standard/maximum)	1/3	—	—	—	—	—	—
Plastic drawer with roller runners, conductive (standard/maximum)	—	1/8	2/10	optional	optional	optional	—
Shelf	2	—	—	—	—	—	—
Shelf with overlays/rails	-/-	3/optional	4/optional	4/optional	6/optional	5/optional	5/optional

*On request

Laboratory
freezers with
an explosion-proof
interior




ULTIMATE	—	—	FROSTER LABEX 330 ULTIMATE	FROSTER LABEX 530 ULTIMATE	FROSTER LABEX 730 ULTIMATE
PRO-ACTIVE	—	FROSTER LABEX 96 PRO-ACTIVE	FROSTER LABEX 330 PRO-ACTIVE	FROSTER LABEX 530 PRO-ACTIVE	FROSTER LABEX 730 PRO-ACTIVE
ESSENTIAL	ESSENTIAL FROSTER LABEX 71	—	—	—	—
EX protection zone	2	2	2	2	2
PC-KIT-NET	Standard on the ULTIMATE, optional on the PRO-ACTIVE, not available on the ESSENTIAL				
Capacity	70 l	95 l	300 l	500 l	700 l
Temperature setting	approx. -15 °C to -22 °C	approx. -5 °C to -25 °C	approx. -10 to -30 °C	approx. -10 to -30 °C	approx. -10 to -30 °C
Voltage	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	optional	optional	optional	optional	optional
Power consumption (in watts)	100	119	540	550	570
Normal consumption (in kWh/24 h)	1.6	1.36	4.33	5.8	6.68
Permitted ambient temperature	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C
Heat emission (max. in watts)	129	159	660	717	706
Weight	net 35 kg, gross 42 kg	net 50 kg, gross 59 kg	net 125 kg/gross 142 kg	net 141 kg/gross 164 kg	net 157 kg/gross 183 kg
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	47 x 51 x 74	54 x 54 x 82	74 x 78 x 166/74 x 7 x 159	77 x 76 x 195.5	77 x 97 x 195.5
Usable dimensions (W x D x H in cm)	35 x 31 x 60 (usable depth at the bottom 15 cm less)	43 x 36 x 43	57 x 42 x 80	59 x 45 x 129	59 x 65 x 129
Exterior dimensions with door open at 90° (W x D in cm)	47 x 96	54 x 106	74 x 142	77 x 144	77 x 166
Shelf (W x D in cm)	35 x 20 (below), 35 x 31 (above)	43 x 36	57 x 42	59 x 45	59 x 65
Maximum load: drawer/shelf	—/25 kg	13 kg/25 kg	—/40 kg	24 kg/40 kg	—/40 kg
Noise emission	39.9 dB (A)	38 dB (A)	51 dB (A)	52 dB (A)	52 dB (A)
Automatic defrost	—	—	✓	✓	✓
Defrost water container for manual draining	—	✓	✓	✓	✓
Temperature deviation Δ T compliant with DIN 13277 without defrosting	3.3 °C	3 °C	1.70 °C	2 °C	2 °C
Re-circulating air cooling	—	—	✓	✓	✓
Alerts in case of power failure	—	✓	✓	✓	✓
Equipped with castors	optional	optional	optional	✓	✓
External housing – chrome-nickel steel 4301	—	—	—	optional	optional
Tabletop	—	optional	—	—	—
Decorative frame	optional	optional	optional	optional	optional
Digital temperature display prepared for external installation into furniture front	—	✓	—	—	—
Refrigerating machine fan, built-in	optional	✓	✓	✓	✓
Refrigerating machine, water-cooled*	—	—	—	optional	optional
Flexible equipment is possible	—	✓	✓	✓	✓
Plastic drawer	—	optional	—	—	—
Plastic drawer with roller runners, conductive	—	—	—	optional	—
Shelf	4	2	—	—	—
Shelf with overlays/rails	—/—	—/—	4/optional	5/optional	5/optional


*On request



Intrinsic safety
Use of conductive, height-adjustable drawers with a variable interior arrangement.

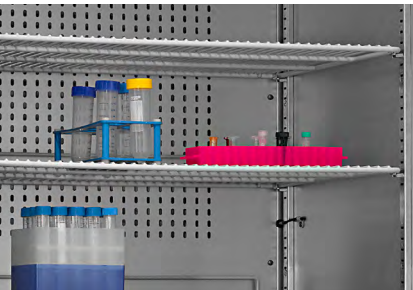

Protected interior
A current discharge system prevents any static charges.

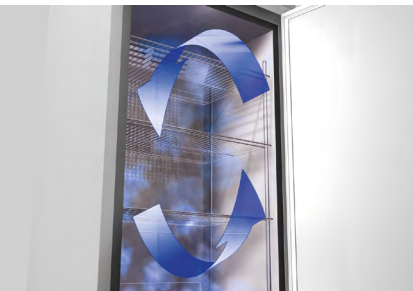

High temperature precision due to the re-circulating air cooling
The axial fan used for the re-circulating air cooling is protected by means of a safety power pack.



Explosion protection
The interior is free of ignition sources.

More detailed information are available on our website:

LABEX®
refrigerators



LABEX®
freezers



Conformity
statement





Temperature documentation with KIRSCH DATANET

Maximum quality assurance for your chilled goods – complete and simply reliable


With KIRSCH-DATANET software the data from your devices (temperature curve, door openings, alarm history etc.) can be effortlessly recorded in your IT network. The network solution (PC-KIT-NET) is a standard feature of KIRSCH ULTIMATE product line and optional for the PRO-ACTIVE. Also older devices can be upgraded with this retrofittable solution.

Kirsch DATALOG can be used for retrofitting the automatic temperature docuemntation and monitoring system on third party devices and devcies without an RS485 interface. It has limited range of function in compare with PC-KIT-NET


Your benefits

- Gapless temperature documentation
- Continuous monitoring
- Automatic alarm forwarding by e-mail
- Precise data evaluation and error analysis possibility, thanks to safely recorded refrigerator operating states
- Possibility to integration third-party devices
- No license fees for the software
- Minimal efforts required for documentation
- Refrigerator settings can be conveniently adjusted from the PC*
- User administration with configurable authorization levels
- Creation of user groups with user assignment possible

*PC-KIT-NET

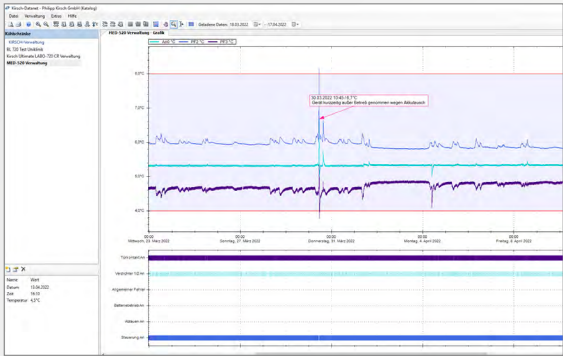

Graphical representation of the temperature curve with comment function and channel selection (e.g. compressor, door contact, defrost, general error and many more).

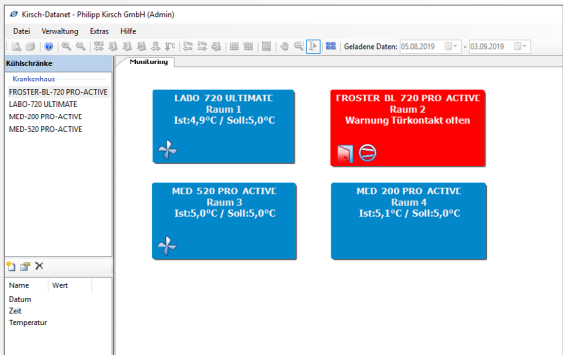

Monitoring overview of all integrated refrigerators and freezers. Malfunctions can be seen at a glance.

Index	Zeit	Alt	RF2	RF3	Störung An	Abtoun An
0568	22.03.2022 23:06:12	5,32°C	5,97°C	4,66°C	An	Aus
0569	22.03.2022 23:06:45	5,13°C	5,98°C	4,66°C	An	Aus
0560	22.03.2022 23:07:17	5,33°C	5,98°C	4,67°C	An	Aus
0561	22.03.2022 23:07:50	5,33°C	5,99°C	4,68°C	An	Aus
0562	22.03.2022 23:08:22	5,33°C	5,98°C	4,68°C	An	Aus
0563	22.03.2022 23:08:55	5,34°C	5,98°C	4,69°C	An	Aus
0564	22.03.2022 23:09:27	5,34°C	5,98°C	4,69°C	An	Aus
0565	22.03.2022 23:10:00	5,34°C	5,98°C	4,69°C	An	Aus
0566	22.03.2022 23:10:32	5,34°C	5,98°C	4,69°C	An	Aus
0567	22.03.2022 23:11:05	5,33°C	5,98°C	4,68°C	An	Aus
0568	22.03.2022 23:11:37	5,33°C	5,98°C	4,67°C	An	Aus
0569	22.03.2022 23:12:10	5,33°C	5,97°C	4,67°C	An	Aus
0570	22.03.2022 23:12:42	5,32°C	5,97°C	4,67°C	An	Aus
0571	22.03.2022 23:13:15	5,31°C	5,97°C	4,64°C	An	Aus
0572	22.03.2022 23:13:48	5,31°C	5,97°C	4,63°C	An	Aus
0573	22.03.2022 23:14:20	5,30°C	5,97°C	4,63°C	An	Aus
0574	22.03.2022 23:14:53	5,30°C	5,97°C	4,62°C	An	Aus
0575	22.03.2022 23:15:25	5,30°C	5,97°C	4,62°C	An	Aus
0576	22.03.2022 23:15:58	5,30°C	5,97°C	4,62°C	An	Aus
0577	22.03.2022 23:16:30	5,30°C	5,97°C	4,62°C	An	Aus
0578	22.03.2022 23:17:03	5,29°C	5,97°C	4,62°C	An	Aus
0579	22.03.2022 23:17:35	5,29°C	5,97°C	4,62°C	An	Aus

Tabular overview of all measurement points with exact temperature values. This view can also be conveniently exported as a CSV file.

Set-up service

Set-up service

The integration into your existing network is simple. The network parameters (IP address etc.) can be entered at the control unit of the devices.

If you have any questions concerning the set-up of your temperature documentation system in connection with our software solution KIRSCH-DATANET, please do not hesitate to contact us.

You can request a personalized offer for setting up your system at temperaturdoku@kirsch-medical.de.



Accessories

KIRSCH refrigerators and freezers provide numerous equipment options that can be retrofitted even at customer location.



PC-KIT-NET

Automatic temperature documentation and monitoring via your network (LAN connection).



KIRSCH-DATALOG

Retrofitting the automatic temperature documentation and monitoring system on third party devices and devcies without an RS485 interface.



Chart recorder

Depending on the model, it is either incorporated in the machine room panel or integrated into an additional housing attachment.



Lockable drawer (top)

Protects sensitive goods from unauthorized access.



Wire shelves

Robust shelves with a load capacity of up to 40 and 50 kg.



Additional cooling machine fan

Is required when the on-site ventilation of the cooling machine is not sufficient (built-in device). Please see installation drawing.



Clean room set

Enables operation in clean room thanks to special air guidance system of the cooling machine. 500/700 liter models also with HEPA filter.



Access Port

Simple insertion of an external temperature sensor with integrated cable feed-through.



External PT100/PT1000 with cold block

Additional temperature sensor for connection to existing/external monitoring system.



Door coupling

Connects the furniture door to the device door.



Decorative frame

Made of stainless steel, allows to cover door with a decorative panel (thickness max. 2 mm).




Vario Support

For comfortable and quick refilling.



Glass door with lock

See clearly: avoid opening the door unnecessarily to inspect the contents. Lockable.

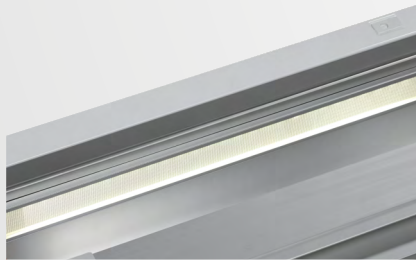

Side wall/ceiling interior lighting

Optional, optimal and energy-efficient lighting for the interior using an LED light strip.



Equipped with castors

Equipped with steering and fixed castors. (depending on the model).



Used in more than 100 countries



Philipp Kirsch GmbH

Im Lössenfeld 14
77731 Willstätt
Germany

Phone: +49 (0) 781 9227-0
Telefax: +49 (0) 781 9227-200
info@kirsch-medical.com

www.kirsch-medical.com



Photograph this QR code
and learn
about our entire
product range.